的日本国特許庁(JP)

① 物許出顯公開

平2-97200 @公開特許公報(A)

®Int. Cl. '

厅内型理备号 識別記号

@公開 平成2年(1990)4月9日

H 04 R 25/00

7923-5D

審査請求 未請求 請求項の数 1 (全4頁)

電子式快聴器 四発明の名称

> 创持 質 昭63-250131

類 路63(1988)10月4日 匈出

森 福 砂発 明 者

長野県諏訪市大和3丁目3番5号 セイコーエブソン株式

会社内

セイコーエブソン株式 砂出 職 人

型京都新宿区西斯宿2丁目4番1号

会社

弁理士 上柳 雅智 外1名 人 聖 外的

삣

1. 短明の名称 尼尔式铁路器

2. 特許期末の延期

音序を収まする音序入力所、前足音声入力庫が 収谷した音叫をデジクル信号に登扱し、貸款及り 州のデークと比較する音が心臓部、消化なび過程 部の音声を凝め精巣得られたアドレスに送づいて 苔無ROMの改形 データを出力し、これをアナ ▽ グの否用アータにする否用合成隊、同記否用合成 瓜によって待られたき戸データを育戸として出力 する音声出力部を有する電子式快略器において、 仮記音戸合成部の音末ROMを、可能電子式鉄筋 背の使用者に適合する言葉ROM又はブログラム されたRAMに取る換えられることを再改とする 惟子武快胜蹈。

3. 類別の砂糖な類別

(政策上の利用分野)

木独明は、最階架使用者の異路度、保鉄、使用 処境に合わせたフィルター、及びを充ROMを所 える粒子式比近辺に関する。

〔従来の技術〕

従来の移路器は、マイクロホンで収留した旨を アンプユニットで増幅した後スピーカーで再生し て外耳辺に送る気味方式と、マイクロホンで収音 した谷を振勁に受えてパイプレーク(新獅子)に 上って闭蓋骨を振動させ内耳に伝える骨弾が式か あった。

(宛明が解決しようとする頭弧)

しかし、かかる従来の精感媒は、マイクロホン、 アンプユニット、スピーカー寺の仮住により百火 される音が必ずしも筋性な使用者の舞蹈反及び病 伙に適合して再歩きれるとは殴らず、使用るによ ってその効果はまらまちであった。また、転降器 使用者の使用無理によっては、不必要は何をや必 美以上の巨大さが入力されてでも、それをそのま まスピーカーから野生してしまい、雌醇な皮肉を

-745--

恐切する。

特別年2-97200 (2)

に不快感を与えるという問題点があった。 (原題を解説するための予改)

大二で上記録館を解決するため、木兜明の耐磨 設は、音声人力回路と音戸出力回路の間に、音戸 必沈確及び音戸合成隊を得え、さらに、これらを 構成するフィルター及び音楽及OMが、随駐費使 用名の無限度、病状及び使用環境に合わせて組み 込まれ、主たは契換出来ることを特徴とする。 (変 度 例)

以下、木丸別について電路的に及づいて詳細に

第1回は、本発明の指示式快概器のブロック四である。フィルク・四路5はたとえば第2回に示すようなコンテンサー及び低低を利み合わせた回路及びその制御部6よりなり、コンタンサーの容量と延続値を標々に掛け合わせて得られた時定数の変化により入力各戸の数形データの軸正をなし、それによって得られた程々の数形のうちもっとも子数である被形データのみを入力者下として出力する四路である。また、このフィルター回路5は

テに変換された後、音声分析回路8のデジタル・ BPF(Band Pass FIlieg)に より各サンブルごとのスペクトル値報に変換され る。

このスペクトル信仰は、正規化回路9で話者による人力音声の発音の放度空を少なくまれ(パワー正規化)、行音編音刊定及びスペクトルの近視化が行なわれた後、方弦符定を受けた人力音声がいつ始まり、いつ話わったのか被出される。

これらのプロセスを経て得られたデジタル順は、デークの内容が変わらとパルスを預する映出回路 10に人力された後、限合的語11でが発取のM· Aの内容と比較され、一致すると一般信号を禁止 回路14及び合成アドレス制御同路12へ出力する。

3の各所合成がは、各所はQ間によりだられた 各用データを、デジタル化した背ボデータを持つ 音乗ROMBの頃に変換し、音圧合成して由力する前路である。

:前逝した検出回路10から発せられたデータ内

和定向政政のラカットするフィルター、例えばローパスフィルター、ハイパスフィルター等を窺えていてもかまりない。

これらのフィルターは、前述したフィルターは 内内ものプログラミングにより、 前距路底所名の 発筋度、 研収及び使用面接に合わせてその存在を 斜部できるようになっている。 たとえば、 初時器 使用者の認用は協か、 造成の騒音を伴う場所であるならば、 その騒音をカットするためにプログラ ムされたフィルターに切ぜえられ、 軸聴路便用者 の使用関係が変化しても、 それに対応したフィル ターを何られるようになっている。 また、 フィル ター制陥離は、 そのプログラムを外間から転送で きるようになっていてもよい。

2の音が起激即は、フィルクーちによって何足されたアナログの音が信号をデジタル化し、あらかじめ値えた音称ROMAのデータと比較検出したの5音声として連過する回路である。

フィルターによって出力されたアナログの音だ 仅号は、A/Dコンパークフを通してデジクル保

おの数化したことを知らせるパルスは、アドレス 例如回路12のリセット位子に人力され、人力答 用が変化するたびにアドレス制即回路12はそのたび ットするので、アドレス制即回路12はそのたび に、プログラミングされたアドレスをはじめから 合成アドレス制即回路と書弁ROMAに出力する。 これをうけて資業ROMAは、アドレス制即回路 により掲載されたアドレスのデーク風舎回路に次 っと州力する。

アドレス制即回路12により指定されたアドレスを受け取った合成アドレス制即回路13は、照合回路から一致保号がこないとクロックに同期してそのアドレス内容を消失し、一致信号がくるとクロックに関明してそのアドレス内容を音楽ROMBは、合成アドレス制即回路からのアドレスが人力されると念成アドレス制即回路からのアドレスが人力されると念成アドレス制即回路からのアドレスが人力されると念成アドレス制即回路の指定したアドレスのアータを然止回路14に送るようにプログラムされている。このとる、禁止回路14は、無合回路からの一致信号を受けて明かれているので、デークはD/A紙

特開平2-97200 (3)

原回路15に出力される。

DンA 乗換四路によりアナログ化された低値と なったデークは、ローパスフィルタ16を通じて 市らかな数形となり、アンプユニットで増幅され た後、スピーカーにより音がとしてあ力される。 なおスピーカーの代わりにパイプレータ(成動子) を使用して、食匠部方式としても良い。

このとを、上注した答案及OM-Bは、補政以配用者の質等度、特状及び使用環境に合わせて組み込まれ、または交換出来るようになっており、資業ROMにプログラムされたデータは、たとえば、組織器便用者が高音域の実際庭状者ならば、高等域を強調した音声デークをもっているか、または直音域を強調した音声デークに切替えられるようになっている。

また、苦寒ROM-Bは、納海盗使用をの残略成、/ 所以及び使用応及に合わせてブログラムの愛更が 可能なRAMであってしよい。

(強明の効果)

以上述べたように、木苑明の電子紅幅展響は、

フィルター制御版のプログラムを変更することに より、福思沙使用での異語度、反映及び使用環境 に合わせてものフィルター特性を制御できるよう になっており、福廷資使用名の使用環境に適合し た扱めて正確な音声データを得ることができる。

また、上述した含まROMは、福島海便川右の 建設度、男状及び使用環境に合わせて組み込まれ、 または受換できるようになっているので、福港海 使用石の必要とする塩のて快速な客内が除られる。


4、 四面の助肌な及明

第1箇は木宛明の支店門である電子式快度別の ブロック間、

第2回は本元明の成子式以右右のフィルク - 回 坊の一例を示す同坊凶。


以上

出版人 ヤイコーエブソン体式会社 化庶人 弁理士 上 御 軽 著(船12)

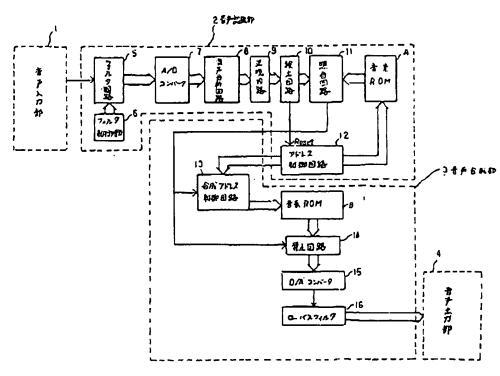

第 1 図

将開平2-97200 (4)

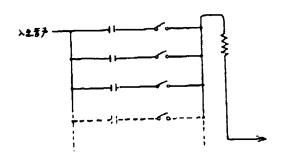

Ø 2 Ø

TOKUKAIIIEI H02-97200

The practical example

Preferred embodiment of the present invention will be explained in detail.

Fig.1 is the block diagram of the invention (Electric hearing device).

Filter circuit 5 is made up of the circuit which has the condenser and the resistance and its control unit 6. The waveform data of the inputted sound was corrected by the time constant transition induced from the combination of a great variety of capacities of condenser and the level of resistance. Only the most frequent waveform data among several waveforms is outputted as the input sound in this circuit. Also, the filter circuit 5 has the filter which cuts the specific frequency (Low pass filter or High pass filter etc.)

These filters can control the characteristic regulated by the programming of the filter control unit 6 with the level of the hearing aid user's hearing level, the condition and the environment. For example, if the environment of the hearing aid user is very noisy place, the filter is changed to the other filter which has the program to cut the noise. If the environment of hearing aid user is changed, there is the adequate filter for the environment. The filter control unit is able to retransmit the program from outside.

The speech recognition unit 2 is the circuit which digitalizes analog sound signals specified by filter 5 and recognizes the sound after comparing and picking up of data of precedently equipped phoneme ROM A.

After the analog sound signal outputted from the filter is converted to the digital signal through A/D converter 7, it is converted to the spectrum information for each sample by BPF (Band Pass Filter).

In this spectrum information, the difference of intensity of inputted pronunciation is diminished (Power normalization). The start and finish of inputted sound which is judged as the sound is outputted after sound-nonsound judgement and spectrum normalization.

The digital data which is made by these processes is compared with the contents of phoneme ROM A at the checking circuit after inputting to the detector circuit 10 which emits pulse if the data contents are changed. If it fits, the consistent signal outputs prohibition circuit 14 and the synthesized address control circuit 12.

Speech synthesis unit 3 is the circuit which converts sound data from speech synthesis unit to data of phoneme ROM B which has digitalized sound data, speech synthesize it and output it.

The pulse which indicates the information of the change of data content from above mentioned detector circuit 10 is inputted to reset terminal at the address control circuit 12. Because it resets the address control circuit 12 each time inputted sound is changed, the address control circuit 12 outputs programmed address to synthesize address control circuit and phoneme ROM A. The phoneme ROM A outputs to address data checking circuit appointed by the address control circuit one after another. The synthesize address control circuit 13 which gets address appointed by address control circuit 12 clears the address content in sync with the clock if the consonance signal does not come from the checking circuit, and outputs the address contents to the phoneme ROM B in sync with the clock if the consonance signal comes. The phoneme ROM B is programmed so that address data appointed by synthesize control unit is sent to the prohibition circuit 14 when the address is inputted from the synthesize control circuit. In this time, the data is outputted to the D/A converting circuit 15 because the prohibition circuit 14 is opened by the receiving the consonance signal from the checking circuit.

The data which is the voltage level after becoming analog data by the D/A converting circuit becomes smooth waveform through low pass filter 16, is amplified by amplifier unit, and is outputted as the sound from the speaker. This system can use the vibrator in stead of speaker (Boneconduction system).

The above-mentioned phoneme ROM B is installed or exchanged in accordance with hearing aid user's the level of hearing impaired, the symptom, and the environment. The programmed data in phoneme ROM has the sound data emphasized the upper register or the data is changed to the sound data emphasized the upper register.

The phoneme ROM B can be the RAM which is able to change the program in accordance with the hearing aid user's the level of hearing impaired, the symptom, the environment

Brief Description of the Drawings

Fig.1 is the block diagram of the electric hearing device

Fig.2 is the circuit diagram of filter circuit of the electric hearing device.